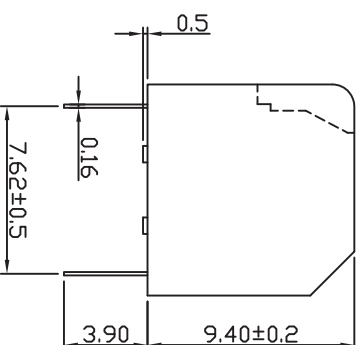





NOTES:

1. Specification:

- 1>. Operation force: 500gf Max.
- 2>. Operation Temperature: -30°C to +85°C.
- 3>. Storage Temperature: -40°C to +85°C.
- 4>. Mechanical Life: 3000 cycles operations.
- 5>. Resistance to Soldering: 250±5°C for 3-5 Seconds.



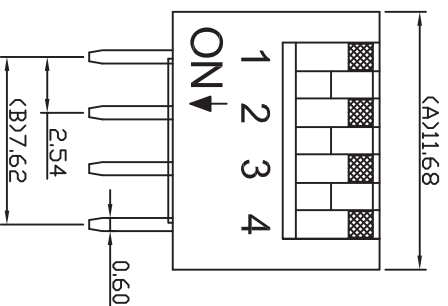
2.PLATING:

- 1>. GOLD flash 1u" (min) SOLDER TAIL,
3u" GOLD PLATING ON THE CONTACT AREA.

3. ELECTRICAL:

- 1> Non-switch Rating: 100mA at 50V DC.
- 2> Switching Rating: 25mA at 24V DC.
- 3> Contact Resistance: Initial 50m Ω Max.
Contact Resistance: After life 100m Ω Max.
- 4> Insulation Resistance: 1000M Ω Min at 500VDC.
- 5> Dielectric Strength: 500V AC for 60seconds.
- 6> Switch Capacitance: 5PF Max at 1MHZ.

4. PACKAGE: 42pcs/Tube, 1344pcs/Box.

[illegible]

深圳市百斯特电子有限公司
SHENZHEN BEST ELECTRONICS CO., LTD.